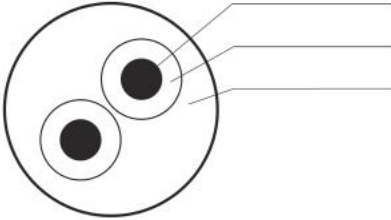


## VL audio S02N25 Speaker cable

Item	2*2.5mm2 Speaker cable	Spec	$\Phi 9.3\text{mm}[(140/0.15\text{BC}*3.5\text{mm})*2\text{C}]$
Conductor	Size	NO/mm	140/0.15BC
	Twist pitch(DIR)	mm	/
Insulation	Material	/	75P PVC
	Color	/	Red/Black
	Ave.thick	mm	0.85
	Min. thick	mm	0.82
	OD	mm	$3.5\pm 0.05$
Filler	Material	mm	/
	OD	mm	/
Twisting	Twist	mm	/
	Total twist OD	mm	/
Shielding	Overlapping	mm	/
	Spiral	/	/
Outer jacket	Material	/	Environmental PVC
	Color	/	70P High flexible ( MATTE ) Black
	Ave.thick	mm	1.15-2.9
	Min. thick	mm	1.1-2.8
	OD	mm	$\Phi 9.3\pm 0.15\text{mm}$
Electrical Data	Conductor-Conductor capacitance	PF/Km	<145.3
	Conductor-Shielding capacitance	PF/Km	/
	Conductor resistance (20°C)	$\Omega$ /Km	6.88
Marking			V-LINE S02N25 2*2.5mm2 PROFESSIONAL HIGH QUALITY SPEAKER CABLE BY VLAUDIO
Packaging		/	100M/ROLL
<p>Profile:</p>  <p>Conductor: 140/0.15BC  Insulation: <math>\text{OD}3.5\pm 0.05</math>  Outer jacket: <math>\Phi 9.3\pm 0.15</math></p>			