

## SS2

### Applications

- Touring performance
- Stadium
- Theatre



### Feature

- 1200W (AES) LF driver
- Thick and elastic lows
- Provide 28 Hz-180 Hz frequency response
- Mounted wear-resisting Nylon bar




### Technical specification

- FREQUENCY RESPONSE: 28 Hz ~ 180 Hz ( $\pm 3$  dB) 23 Hz ~ 250 Hz (-10 dB)
- NOMINAL COVERAGE<sup>(-6dB)</sup>: Omnidirectional
- SENSITIVITY(@1w/1m): 101 dB SPL
- POWER RATING(AES): 2400W
- NOMINAL IMPEDANCE: 4 ohm
- MAXIMUM SPL: 142 dB (peak)
- DRIVERS: LF 2x18" waterproof driver

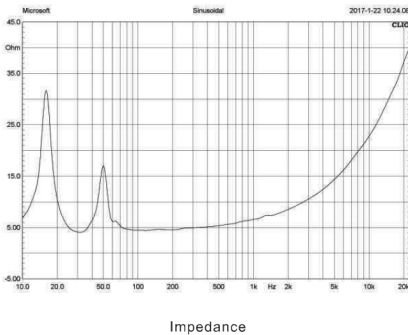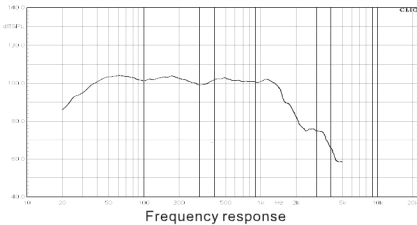

### Physical data


- DIMENSIONS(HxWxD): 575 x 1240 x 680 mm / 23"x49"x27"
- WEIGHT: 90 kg / 198 lbs
- CONNECTORS: 2xNL4 connectors
- SPEAKER CABLES: 1+1-
- MATERIALS: 25mm and 30mm Baltic birch plywood
- FINISH: Black Polyurea paintings
- GRILLE: Black epoxy mesh grille with acoustically reticulated cloth

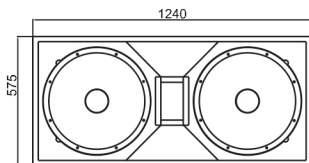

Front



Top



Side