

Highlights:

- 2 x XLR inputs
- 3.5mm stereo jack input
- Integrated Bluetooth receiver
- Internal mixing & DSP processing
- 4-channel Dante™/AES67

Product information:

The NWP320 is a Dante™/AES67 network input panel, featuring two XLR input connectors, a single 3.5 mm stereo jack stereo input connection, and an integrated Bluetooth receiver, which can be used to transmit audio signals in a Dante™ audio network.

Various further integrated DSP functions such as EQ, automatic gain control, and other device settings can be configured through the AUDAC Touch™.

The IP-based communication makes it future-proof while also being backwards compatible with many existing products. Thanks to the limited PoE power consumption, NWP320 is compatible with any PoE network-based installation.

Besides the elegant design, the front panel is finished with high-quality fingerprint-resistant glass. The wall panels are compatible with standard EU-style in-wall boxes, making the wall panel the ideal solution for solid and hollow walls. Black and white color options are available to blend into any architectural design.



Certification:



Properties:

Internal mixing & EQ

Additional Inputs:

Bluetooth

System specifications:

Inputs	2 x XLR female (in)
	3.5 mm Jack (Stereo)
Control	2 buttons - Mic / Line switching
Indicators	2 LED's (RGB) - Input status
Configurable settings	IP settings
	Device name
	Input range (Mic / Line)
	Gain
	Phantom power
	DSP (EQ)
	Mixing
Configuration	Audac Touch™
Integrated DSP	Yes (EQ)
Automatic level control	Yes
Phantom power	+48 V DC
Power Supply	PoE powered (IEEE 802.3at)
Connectors	3.5 mm Jack stereo (audio in)
	RJ45 (network + PoE)
	1 x XLR female (audio in)

Product Features:


Construction	ABS
Front finish	Elegant front panel with glass
Colours	White (RAL9003) (NWP320/W)
	Black (RAL9005) (NWP320/B)
Compatible devices	Any Dante™/AES67 compatible audio device
Dimensions	80 x 80 mm (W x H) (Remote wall panel)
Installation standard	Compatible with EU installation materials

Variants:

- NWP320/B - Black version
- NWP320/W - White version

Architects' and Engineers' Specifications:

Dante™/AES67 network input panel shall have two XLR input connections, a stereo 3.5 mm jack input connection, and a Bluetooth receiver. The network input panel shall have 4 x 4 Dante™/AES67 network audio I/O channels. Phantom power shall be available on XLR inputs. Pre-gain shall be available for microphone/line level adjustment on XLR inputs. The available DSP processing functionality on the inputs shall include Automatic Gain Control (AGC), 7-band parametric equalizing, and volume. The output channels shall include mixer, volume, and gain functionality. The mixer shall be able to mix all mapped input sources on the selected output. There shall be a single physical button with LED indicators on the front panel. Pressing and holding the button shall enable Bluetooth pairing when both LEDs blink in blue color. A total system control application shall be freely available and compatible with a wide variety of operating systems, including Android, iOS, Windows, and Mac. The brightness of the LED indicators shall be adjustable and button functions shall be disabled by using the application. The Bluetooth input settings in the application shall allow for the change of the Bluetooth device name, show known devices, and discovery for pairing. The wall panel housing shall be constructed out of ABS with a front panel of glass. The device shall have a built-in depth of 75 mm and shall be compatible with most standard EU (80x80 mm) style in-wall boxes for solid and hollow walls. It shall have an optional US-style adapter kit. The power supply shall be transferred over PoE (Power over Ethernet) compatible with the IEEE 802.3bt standard. Its weight shall not exceed 0.14 kg.

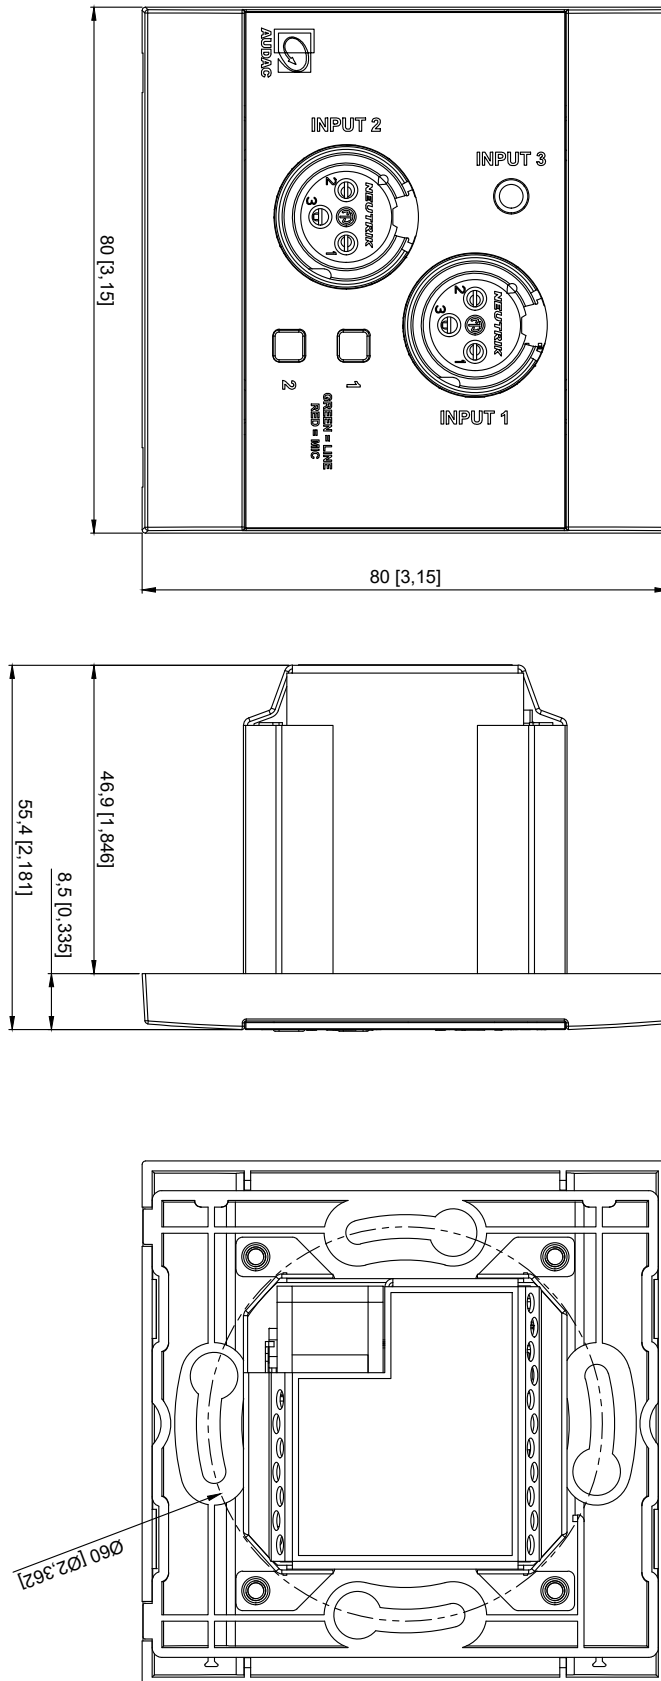

NWP320		Product description		
		DANTE/AES67 NETWORKED AUDIO INPUT PANEL 2xXLR & 3.5MM JACK & BT (4CH)+ POE		
MM [INCH]	Scale	Outer dimensions	Unit height	Weight
	1 : 1	(w x h x d) 80 X 80 X 55,4 mm 3,15 X 3,15 X 2,181 "	N/A	0,12 kg 0,265 lbs